

Door Sprag™

Door Sprag

Description	Est. Weight
Triangular hypalon seal	3 lbs

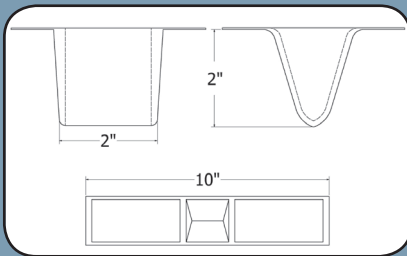


Figure 1: Door Sprag schematics

The Door Sprag fills gaps between the dock leveler and the pit wall. It's compatible with most door styles and is constructed of a hypalon material. With the inclusion of door sprags, your loading dock is given bolstered sealing qualities.



Figure 2: Triangular design for best fit



Figure 3: Door Sprag attachment and pit gap fill

Design Highlights

- Design for use with standard sectional doors; consult APS Resource for other applications
- Helps minimize gap between leveler and pit wall
- Hypalon rubber material shows a resistance to chemicals, extreme temperatures and ultraviolet light
- This product carries a (1) year limited warranty with APS Resource

Technical Specifications

Purpose	Acts as an extra light deterrent and energy saving addition to a loading dock
Available Sizes	Up to 10' with or without side flaps
	Custom sizes available
Construction Material	Hypalon
	Open cell foam

Project Information

Job Name _____
 Address _____
 General Contractor _____
 Distributor _____
 Model _____
 Quantity _____

Certified for Construction

By _____
 Company _____
 Address _____
 Date _____

